

TWC-52XR

HD TVI IR BULLET




KEY FEATURES

- 5 MP high-performance CMOS
- 2560 x 1944 resolution
- 2.8 mm fixed focal lens
- EXIR 2.0, smart IR, up to 40m IR distance
- OSD menu, DNR, DWDR
- 4 in 1 video output (switchable TVI/AHD/CVI/CVBS)
- IP67
- Up the coax



SPECIFICATION	TWC-52XR
Camera	
Image Sensor	5.0 megapixel progressive scan CMOS
Resolution	2560 (H) × 1944 (V)
Min. illumination	0.01 Lux@(F1.2, AGC ON), 0 Lux with IR
Shutter Time	1/25 s to 1/50,000 s
Lens	2.8 mm fixed focal lens
Horizontal Field of View	85.5°
Lens Mount	M12
Day & Night	IR cut filter
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360°
Synchronization	Internal synchronization
Frame rate	5MP@20fps, 4 MP@25fps, 1080p@25fps
Menu	
AGC	Support
D/N Mode	Auto/Color/BW
White Balance	ATW/MWB
BLC	Support
dWDR	Support
Language	English
Functions	Brightness, Sharpness, DNR, Mirror, Smart IR
Interface	
Video Output	1 HD analog output
Switch button	TVI/AHD/CVI/CVBS
General	
Operating Conditions	-40 °C to 60 °C, humidity: 90% or less (non-condens.)
Power Supply	12V DC±25%
Power Consumption	Max. 4.3 W
Ingress Protection	IP67
Material	Front cover: Metal Main body: Plastic
IR Range	Up to 40 m
Communication	Up the coax
Dimensions	86.7 mm × 81.6 mm × 226 mm
Weight	Approx. 680g

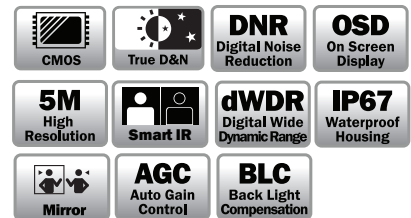

DIMENSIONS:

